


imageRUNNER 2630

# ROBUST, RELIABLE AND HIGHLY EFFICIENT A3 MONO MULTIFUNCTION PRINTER

## MAIN CONFIGURATION OPTIONS

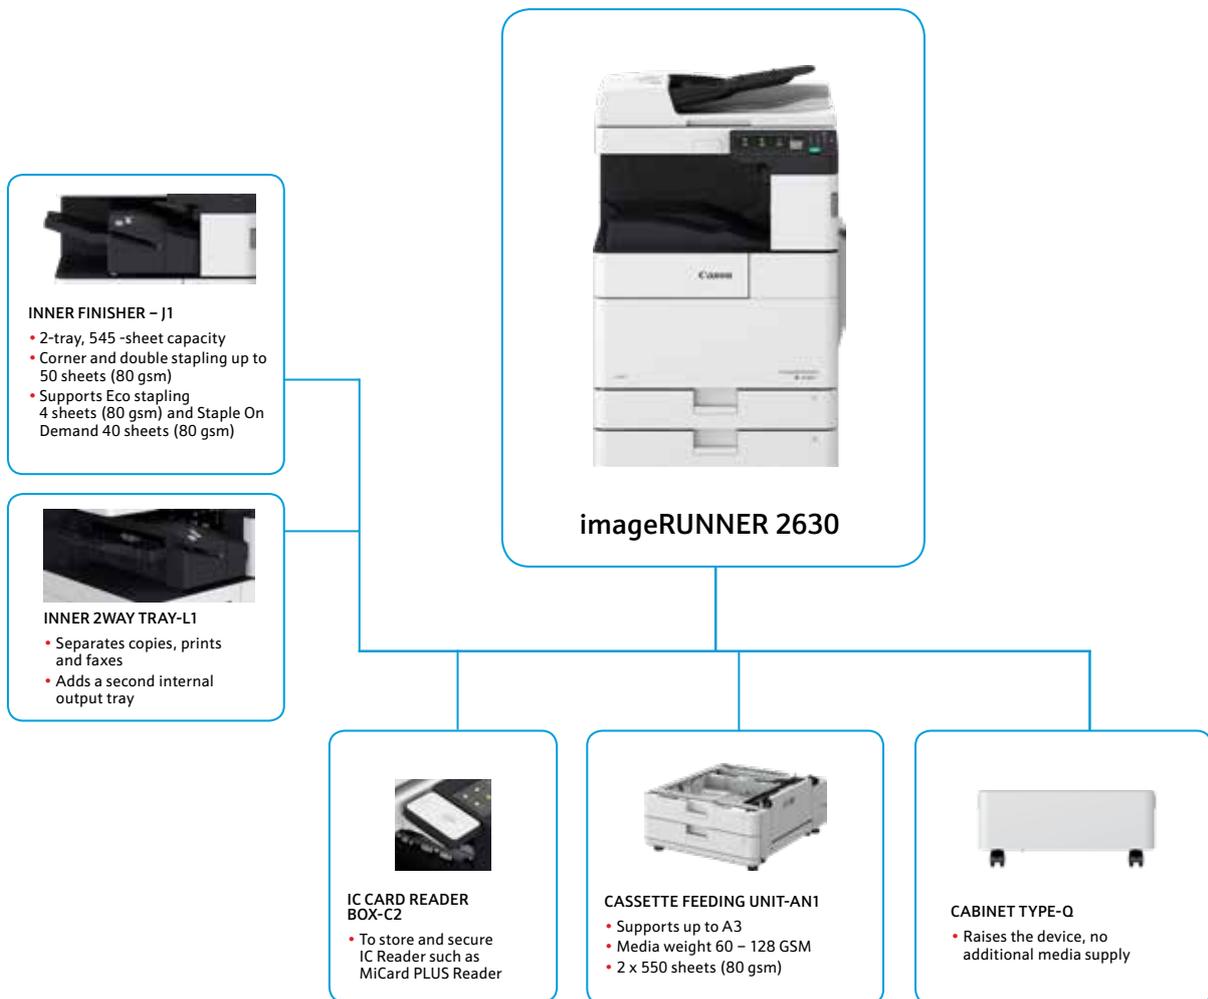

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility, please refer to the Online Product Configurator or consult your sales representative.

**Canon**

<b>MAIN UNIT</b>		<b>Fonts</b>	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT/JK/S/T* <sup>1</sup> (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts* <sup>2</sup> PS fonts: 136 Roman * <sup>1</sup> Requires optional PCL International Font Set-A1 * <sup>2</sup> Requires optional Barcode Printing Kit-D1
<b>Machine type</b>	A3 Monochrome Laser Multifunctional	<b>Print Features</b>	Suspend Job Timeout, Profile Settings, Secure Print, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Toner Reduction, Poster Printing, Forced Hold Printing
<b>Core functions</b>	Print, Copy, Scan, Send and Optional Fax	<b>Operating System</b>	UFRIL: Windows® 7/8.1/10/Server 2008 /Server 2008 R2/Server 2012/Server 2012 R2/Server 2016, MAC OS X (10.9 or later) PCL: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016
<b>Processor</b>	Canon Dual Custom Processor(Shared)		PS: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016, MAC OS X (10.9 or later) PPD: Windows® 7/8.1/10, MAC OS X (10.9 or later)
<b>Control Panel</b>	Standard: 17.8 cm/7 TFT LCD WSVGA Colour Touch panel	<b>COPY SPECIFICATIONS</b>	
<b>Memory</b>	Standard: 2.0GB RAM	<b>Copy Speed</b>	iR 2630: 30 ppm (A4), 15 ppm (A3), 21 ppm (A4R), 17 ppm (A5R)
<b>Interface Connection</b>	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n)	<b>First-Copy-Out Time (A4)</b>	iR 2630: Approx. 5.9 seconds or less
	OTHERS Standard: USB 2.0 (Host) x3, USB 2.0 (Device) x1	<b>Copy resolution (dpi)</b>	Reading: 600 × 600 Printing: Up to 1,200 x 1,200
<b>Paper Supply Capacity (A4, 80gsm)</b>	Standard: 1,200 sheets Maximum: 2,300 sheets (with Cassette Feeding Unit-AN1)	<b>Multiple Copies</b>	Up to 9,999 copies
<b>Paper output capacity (A4, 80gsm)</b>	Standard: 250 sheets Maximum: 545 sheets (with Inner Finisher-J1)	<b>Copy Density</b>	Automatic or Manual (9 Levels)
<b>Finishing Capabilities</b>	Standard model: Collate, Group Finisher model (Inner Finisher-J1): Collate, Group, Offset, Staple-Free Staple, Staple on Demand	<b>Magnification</b>	25% - 400% (1% Increments)
<b>Supported Media Types</b>	Paper Cassette (1/2): Thin, Plain, Thick, Colour, Recycled, Pre-punched  Multi-purpose Tray: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Tracing*, Label, Bond, Envelope *Some types of tracing paper cannot be used.	<b>Preset Reductions</b>	25%, 50%, 61%, 70%, 81%, 86%
	Upper Cassette 1: Standard size: A4, A4R, A5R, B4, B5, B5R Custom size: Min. 139.7 x 182.0 mm up to 297.0 x 390.0 mm	<b>Preset Enlargements</b>	115%, 122%, 141%, 200%, 400%
<b>Supported Media Sizes</b>	Lower Cassette 2: Standard size: A3, A4, A4R, A5R, B4, B5, B5R Custom size: Min. 139.7 x 182.0 mm up to 297.0 x 431.8 mm	<b>Basic Copy Features</b>	Preset R/E Ratios by Area, Paper Setting, Previous Setting, Favourite Setting, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel
	Multi-purpose tray: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Envelopes [No. 10 (COM 10), Monarch, ISO-C5, DL] Custom Size/Free Size: Min. 98.0 x 148.0 to 297.0 x 431.8 mm	<b>Special Copy Features</b>	Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Different Size Originals, Density Adjustment, Original Type Selection, Sharpness, Erase Frame, Shift, Gutter, Job Done Notice, Copy ID Card, Free Size Original
<b>Supported Media Weights</b>	Paper Cassettes (1/2): 60 to 128 gsm Multi-purpose Tray: 52 to 220 gsm (Thin: vertical grain paper feed only: 52 to 59 gsm) Duplex: 60 to 105 gsm	<b>SCAN SPECIFICATIONS</b>	
<b>Warm-up Time (With Quick Start Up Mode On)</b>	12 seconds or less * * Time from device power-on until copy ready (not print reservation) From Sleep Mode: 10 seconds or less 4 seconds or less* *Time from device power-on to when key operations can be performed on the touch panel display.	<b>Selectable type</b>	iR2630: Standard Document Feeder
<b>Dimensions (W x D x H)</b>	iR 2630: 586 x 713 x 910 mm	<b>Document Feeder Paper Capacity (80 gsm)</b>	50 Sheets
<b>Installation Space (W x D)</b>	iR 2630: 1363 x 1273 mm* *with Cassette open + 100 mm gap around the main body	<b>Acceptable Originals and weights</b>	Platen: Sheet, Book (Height: Up to 40mm)
<b>Weight</b>	iR 2630: Approx. 73.6 kg without toner	<b>Supported media sizes</b>	Document Feeder media weight : 1-sided scanning: 38 to 128 gsm (BW/CL)* 2-sided scanning: 38 to 128 gsm (BW/CL)* * Only 1-sheet feeding is supported in 38-52 and 105-128 gsm. (Feeding is guaranteed but geometric distortion correction is not guaranteed)
<b>PRINT SPECIFICATIONS</b>		<b>Scan Speed (ipm: BW/CL; A4)</b>	Platen: max. scanning size: 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, B5, B5R, B4R Custom size: 128.0 x 148.0 mm to 297.0 x 431.8 mm 1-sided Scanning: 35/25 (300 dpi), 25 (BW; 600 dpi) 2-sided Scanning: 12/8 (300 dpi), 8 (BW; 600 dpi)
<b>Print Speed(BW)</b>	iR 2630: 30 ppm (A4), 15 ppm (A3), 21 ppm (A4R), 17 ppm (A5R)		
<b>Print Resolution (dpi)</b>	1,200 x 1,200		
<b>Page description languages</b>	Standard: UFR II Optional: Genuine Adobe PostScript Level 3, PCL 6		
<b>Direct Print</b>	Direct printing available from USB memory and Remote UI. Supported file types: PDF, EPS, TIFF, JPEG and XPS		
<b>Printing from mobile and cloud</b>	AirPrint, Mopria, Google Cloud Print, Canon PRINT Business and uniFLOW Online A range of software solutions is available to provide printing from mobile devices and cloud-based services depending on your requirements. Please contact your sales representative for further information		

Scan Resolution (dpi)	Copy: 600 x 600 Send: (Push) up to 600 x 600, (Pull) up to 600 x 600 Fax: up to 600 x 600	Data	Optional: Data Loss Prevention (Requires uniFLOW)
Pull Scan Specifications	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 7/8.1/10 Windows® Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016	Network	Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME
Scan Method	Send functionality available on all models Scan to USB Memory Key: Available on all models Scan to Mobile Devices and cloud-based services: A range of solutions is available to provide scanning to mobile devices or cloud-based services depending on your requirements. Please contact your sales representative for further information. TWAIN/WIA Pull scanning available on all models	Document	Standard: Secure Print, Encrypted PDF, Encrypted Secure Print, Device signature Optional: User signature
<b>SEND SPECIFICATIONS</b>		<b>ENVIRONMENTAL SPECIFICATIONS</b>	
Destination	E-mail/Internet FAX (SMTP), SMB, FTP, WebDAV, Super G3 FAX (Optional)	Operating Environment	Temperature: 10 to 30 °C (50 to 86 °F) Humidity: 20 to 80 % RH (Relative Humidity)
Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)	Power source	110-120V, 60Hz, 7.0A 220-240V, 50/60 Hz, 5.2 A
Send resolution (dpi)	Push: 600 x 600 Pull: 600 x 600, 400 x 400, 300 x 300, 200 x 200, 150 x 150, 75 x 75	Plug (Main Unit)	NEMA 5-15P (120V) CEE7/7 (230V)
Communication protocol	File: FTP (TCP/IP), SMB (TCP/IP), WebDAV E-mail/Fax: SMTP (send), POP3 (receive)	Power consumption	Maximum: Approx. 1500W Standby: Approx. 20W Sleep mode: Approx. 0.6 W
File Format	Standard: TIFF (MMR), JPEG*, PDF (Compact, Searchable, PDF A1-b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature), Office Open XML (PowerPoint, Word) Optional: PDF (Trace & Smooth), PDF/XPS (User Signature) *Single page only	Noise levels (BW/CL)	Plugin Off: iR 2630: Approx. 0.09W Typical Electricity Consumption (TEC)* : iR 2630: 1.5 kWh *As per US ENERGY STAR® version 2.0 Sound Power Level (LwAd) Active: iR 2630: 71.0 dB or Less*1 Standby: No noise*2 No noise means that the emission sound pressure level of each bystander position is lower than the absolute standard with the background noise of ISO 7779.
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation	Standards	Sound Pressure Level (LpAm) (Reference) Bystander's position: Active: iR 2630: 1-sided: LpAm 50 dB, 2-sided: LpAm 53 dB Standby: No noise*2 (Reference) No noise means that the emission sound pressure level of each bystander position is lower than the absolute standard with the background noise of ISO 7779. *1 RAL-UZ205(2017) compliant (Data taken from Blue Angel Standard value) *2 Reference value: measured only one unit with ISO7779, described with ISO9296:2017
<b>FAX SPECIFICATIONS</b>		<b>CONSUMABLES</b>	
Optional/ standard	Optional on all models	Toner Cartridges	GPR-62 Toner Black
Maximum Number of Connection Lines	1	Toner (Estimated Yield @ 6% Coverage)	Black: 30,000 impressions (A4)
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps	<b>SOFTWARE AND PRINTER MANAGEMENT</b>	
Compression Method	MH, MR, MMR, JBIG	Tracking and reporting	
Resolution (dpi)	400 x 400 (ultrafine), 200 x 400 (superfine), 200 x 200 (fine/photo), 200 x 100 (normal)	Universal Login Manager (ULM): Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device. uniFLOW Online Express*: Combining with ULM you can gain further control and highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location. *Installation, activation and registration required	
Sending/Recording Size	A3, A4, A4R, A5*1, A5R*1, B4, B5*2, B5R*1 *1 Sent as A4 *2 Sent as B4		
FAX memory	Up to 30,000 pages		
Speed dials	Max. 200		
Group dials/destinations	Max. 199 dials		
Sequential broadcast	Max. 256 addresses		
Memory backup	Yes		
Fax Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, TX Report		
<b>STORE SPECIFICATION</b>			
Memory Media	Standard: USB Memory		
<b>SECURITY SPECIFICATIONS</b>			
Authentication	Standard: Universal Login Manager (Device and Function Level Log-in), uniFLOW Online Express*, User Authentication, Department ID Authentication, Access Management System Optional: My Print Anywhere secure print (Requires uniFLOW), Picture Login *No charge for this solution; however activation is required.		

<p><b>Remote management tools</b></p>	<p>iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware applications, meter capture and reporting, driver and resource management)</p> <p>imageWARE Remote Compatible with imageWARE Remote services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance)</p> <p>Content Delivery System: Allows the Remote distribution of firmware, iR options; Remote User Interface (RUI) Web based interface to each device that helps to provide remote device management and control</p>	<p><b>HARDWARE ACCESSORIES</b></p> <p><b>CARD READERS</b></p>	<p>COPY CARD READER-F1 - Magnetic physical card access system. (Integrates with Department ID, not for use with uniFLOW)</p> <p>IC Card Reader Box-C2</p> <p>COPY CARD READER ATTACHMENT-H3 - Attachment kit for Copy Card Reader-F1 only.</p>
<p><b>Scanning software</b></p>	<p>Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device</p>	<p><b>SYSTEM AND CONTROLLER OPTIONS</b></p> <p><b>PRINT ACCESSORIES</b></p>	<p>PCL INTERNATIONAL FONT SET-A1 - Adds PCL support for Andalé Mono WT //K/S/T (Japanese/Korean/Simplified Chinese/Traditional Chinese).</p> <p>PS PRINTER KIT-BT1 - Provides networked printing support for Adobe PostScript 3 printing.</p> <p>BARCODE PRINTING KIT-D1 - Provides the ability to print 1D and 2D barcodes on output using jet caps technology.</p> <p>COPY CONTROL INTERFACE KIT-D1: Allows connection (CCV1 I/F) between 3rd party copy control terminal and Canon's iR-ADV range for cost recovery use.</p> <p>SUPER G3 FAX BOARD-AV2</p> <p>REMOTE FAX KIT-A1 - Enables the device to send and receive fax from another device connected with a fax board.</p>
<p><b>PAPER SUPPLY OPTIONS</b></p> <p><b>CASSETTE FEEDING UNIT-AN1</b></p>	<p>Paper Capacity: 550 sheets x 2 (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched Paper Size: A3, A4, A4R, A5R, B4, B5, B5R, Custom size: 139.7 x 182.0 mm to 297.0 x 431.8 mm Paper Weight: 60 to 128 gsm Power Source: From the Main Unit Dimensions (W x D x H): 565 x 650 x 248 mm (attached to the main unit) Weight: Approx. 23.5 kg</p>	<p><b>BARCODE PRINTING</b></p>	<p>ADF ACCESS HANDLE-A1 - Attaches to the document feeder, making access easier for seated users.</p>
<p><b>ENVELOP FEEDER ATTACHMENT-D1</b></p>	<p>Attaches to the 2nd paper drawer for easy envelope feeding. Holds up to 50 envelopes.</p>	<p><b>SYSTEM ACCESSORIES</b></p>	<p>STAPLE CARTRIDGE</p>
<p><b>OUTPUT OPTIONS</b></p> <p><b>INNER 2WAY TRAY-L1</b></p>	<p>Allows the separation of copies, prints and faxes. Adds a second internal output tray to give a combined output capacity of 350 sheets (upper tray 100 sheets/lower tray 250 sheets).</p>	<p><b>FAX ACCESSORIES</b></p>	<p>STAPLE-P1 - For stapling (2 x 5,000 pcs)</p>
<p><b>INNER FINISHER-J1 (Internal)</b></p>	<p>Number of Trays: 2 Upper Tray Capacity*: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: 45 sheets Lower Tray Capacity*: A4, A5, A5R, B5: 500 sheets, A3, A4R, B4, B5R: 250sheets, A6R: 30 sheets *with 81.4 gsm paper Paper Weight: 52 to 220 gsm Staple Position: Corner, Double Staple Capacity: Corner and Double Stapling: A4/B5: 50 sheets (52 to 90 gsm) A3/A4R/B4: 30 sheets (52 to 90 gsm) Eco Staple: A3/A4/B4/B5: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (81.5 to 105 gsm) Staple On Demand: 40 sheets (80 gsm) Dimensions (W x D x H): 604 x 535 x 205 mm (when the extension tray is extended) Weight: Approx. 7.3 kg</p>	<p><b>OTHER OPTIONS</b></p> <p><b>ACCESSIBILITY ACCESSORIES</b></p>	<p>ADF ACCESS HANDLE-A1 - Attaches to the document feeder, making access easier for seated users.</p>

## Software & Solutions



## Compatibility



[www.cla.canon.com/BlancoyNegro\\_imageRUNNER](http://www.cla.canon.com/BlancoyNegro_imageRUNNER)

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. AirPrint and the AirPrint logo are trademarks of Apple Inc. Canon, imageRUNNER, imageWARE, imagePASS, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. Canon products offer certain security features, yet many variables can impact the security of your devices and data. Print speed is based on internal testing. Print speed may vary depending on the number of copies selected, as well as on the settings for size, type, and orientation of paper. Canon does not warrant that use of its features will prevent security issues. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance. All other referenced product names and marks are trademarks of their respective owners. All printer output images are simulated. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors.  
©2019 Canon U.S.A., Inc. All rights reserved.



Canon U.S.A., Inc.  
Latin America Group  
One Canon Park  
Melville, NY 11747  
U.S.A